



EPO - DG 1

25. 02. 2004

(79)



PCT/EP 0 3 / 1 4 9 9 1

25 FEB 2004



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 18 MAR 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

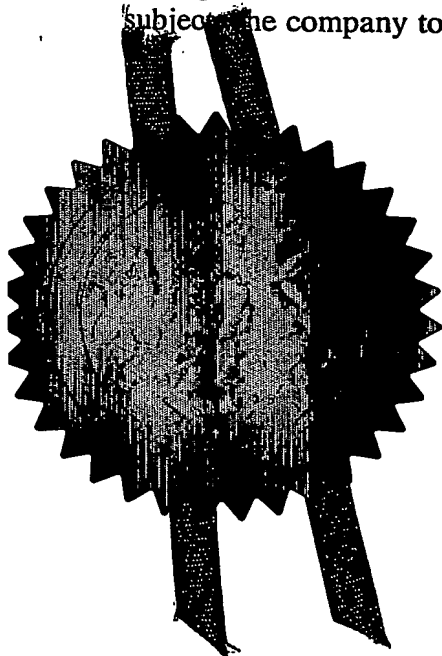

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)


Signed *Ansures*

Dated 9 January 2004

1777

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

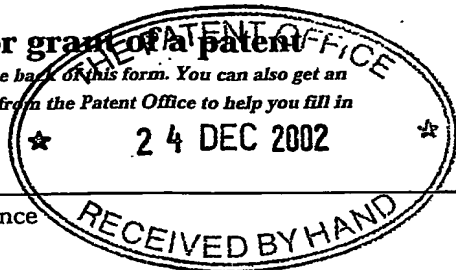

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

302340GB/VRD/JH/erw

2. Patent application number

(The Patent Office will fill in this part)

0230199.2

24 DEC 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Esselte N.V
Industriepark-Noord 30
PO Box 859100 Sint Niklaas
BELGIUM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

BELGIUM

06932891001

4. Title of the invention

INFORMATION ON CONSUMABLES

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Page White & Farrer
54 Doughty Street
London
WD1N 2LS
United Kingdom

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 12

Claim(s) 3

Abstract

Drawing(s) 12

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature 
PAGE WHITE & FARRER

Date
24 December 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Virginia Rozanne Driver
020 7831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

INFORMATION ON CONSUMABLES

The present invention relates to the provision of information on consumables in the context of thermal printers.

Thermal printers are widely known and generally comprises a printing means comprising a thermally activatable printhead for printing onto an image receiving tape. Typically, the image receiving tape has an upper layer for receiving an image and a removable liner layer or backing layer secured to the upper layer by a layer of adhesive, such that after an image has been printed the liner layer or backing layer can be removed and the image receiving tape can be stuck down in the form of a label. Such thermal printers include cutters for cutting off a length of image receiving tape after the image has been printed. Such thermal printers operate with a consumable in the form of image receiving tape, or any other image receiving substrate such as heat-shrink tubes, magnetic, iron-on labels, plastic strips, etc.

In addition, the printer can utilise an ink ribbon cassette which supplies ink ribbon in overlap with the image receiving tape at the printhead.

The term "consumable" is used herein to denote any appropriate form of providing image receiving tape or image transferring substance. A number of forms of consumables are known in the art, including cassettes which comprise a housing in which is located a supply of image receiving tape. Cassettes are generally usable once only, such that once the image receiving tape has been consumed, the cassette (including the housing) is thrown away.

Another type of consumable is a holder, which comprises a spool around which image receiving tape is wound. The spool may or may not be driven, and generally comprises a plastic component.

RECEIVED
FEB 10 1984
FBI - NEW YORK

Another type of consumable is a roll of tape without a permanent holder, for example wound on a paper core. These are termed "supplies".

As already mentioned, in thermal printers, an image is generally generated by activation of a thermal printhead against an ink ribbon cassette, such that ink from the ink ribbon is transferred onto the image receiving tape at a print zone. So-called direct thermal tapes are also available, in which an image is created directly onto the direct thermal tape without the interposition of an ink ribbon cassette. The term "consumable" also encompasses ink ribbon or other thermal transfer materials.

It is known in the art to provide a consumable, mostly a cassette, which has means for identifying parameters of the image receiving tape inside the cassette. For example, the cassette may identify the width of the image receiving tape, the nature of the image receiving tape (for example its material properties, thermal transfer, direct thermal etc.) or other tape parameters. It is also known to use these parameters in controlling certain operations of printing apparatus. For example, the width of the tape can be detected and the size of characters to be printed can be adjusted accordingly.

A piece of information which is particularly interesting is the amount of tape which is remaining which can be used for printing each time a consumable is inserted into a thermal printing apparatus. It is an aim of the present invention to allow such information to be held at a consumable in a convenient and secure manner.

Reference is made to US 5,821,975 (Francotyp-Postalia AG & Co.) which relates to a franking machine. In particular, that patent discloses that an ink ribbon cassette can have a memory (optical, magnetic or electronic) which holds information relating to the degree of usage of the ink ribbon. Nothing in this document relates to the problem of updating status information associated with an image receiving tape.

Reference is also made to EP-A-1066969 (Brady Worldwide, Inc.) which describes a system where the consumable comprises a plurality of pre-cut labels secured by adhesive to a label web. An inventory of labels is read from a memory device associated with the labelling medium supply spool. After each label is printed, the inventory of labels is altered by writing data to the memory device. Therefore, the inventory of labels indicates how many labels have been used, and therefore how many labels are remaining assuming that the initial number of labels on the web is known. This requires a memory chip associated with the labelling medium.

Reference is also made to US 5,605,404 (Seiko Epson). This document discloses a tape cartridge cooperable with a thermal printer, the tape cartridge having a one chip microprocessor which holds information about the tape in the tape cartridge. In particular, the microprocessor can hold information including a residual amount of tape in the tape cartridge, a code representing a user, a consumed amount of tape and/or a password. The microprocessor can be updated to indicate the amount of tape left in the tape cartridge by determining the used tape length by counting the number of steps of the stepping motor.

This device however requires the use of a microprocessor at the tape cartridge, which increases the cost of the tape cartridge. Moreover, electrical connections are required for the microprocessor.

According to one aspect of the present invention there is provided a printing apparatus using a consumable providing at least one of an image receiving substrate and a thermal transfer material, the consumable carrying a tag holding information relating to the consumable, the printing apparatus comprising: printing means for printing an image; a tag reader arranged to receive said information from the tag via a contactless link in the form of electromagnetic waves; and a processor arranged to receive said information and to control operation of the printing apparatus in dependence thereon.

Another aspect of the invention provides in combination, a printing apparatus and a consumable providing at least one of image receiving substrate and thermal transfer image having a tag holding information relating to the consumable, the printing apparatus comprising: printing means for printing an image; a tag reader arranged to read said information from the tag on the consumable via a contactless link in the form of electromagnetic waves; and a processor arranged to receive said information and to control operation of the printing apparatus in dependence thereon.

Another aspect of the invention provides a consumable providing at least one of image receiving substrate and thermal transfer material and carrying a tag holding information relating to the consumable, and having a transmitter for transmitting the information via a contactless link in the form of electromagnetic waves.

The use of a tag on the consumable which transmits information via a contactless link, e.g. RF waves, has a number of advantages over a memory chip or microprocessor, in particular it is cheaper to implement. It is particularly advantageous where the consumable is a tape supply itself, where it would not be possible to use a microprocessor because of the need to attach that microprocessor to a cassette or holder of some kind. An RF tag can readily be implemented in the supply itself by sticking onto inside of media supply roll.

Because the link is contactless, there is no risk of information loss due to poor electrical contacts. Moreover, an RF tag is passive, in that it does not request an onboard power supply. The reader does not need to be located in a particularly precise location in the printing apparatus, and, as described in the following, can read more than one tag. An RF tag is robust and durable.

The use of an RF tag also has advantages over existing optical system because it allows variable information to be written back to the supply and also allows a high density of information to be included.

The printing apparatus can include tape usage monitoring means for monitoring usage of the image receiving tape as images are printed. This can be done by providing markings on the rear of the tape in combination with an optical reader on the printing apparatus, or by measuring encoder pulses on the shaft of a motor associated with the tape spool.

In the described embodiment, the status information includes the amount of image receiving tape remaining, and it is updated in dependence on the output of the tape usage monitoring means. Thus, the length of the tape which has been used is identified, regardless of the number of labels which have been produced. This is because the length of a label can vary in accordance with the requirements of a user.

The RF tag can also hold parameter information identifying parameters of the image receiving tape usable for controlling operation of the printing apparatus. The parameter information can identify for example the width and/or the nature of the image receiving tape.

The printing apparatus can comprise a display adapted to display said status information and/or said parameter information. The printing apparatus can also include a cutting system arranged to cut off a portion of the image receiving tape, the cutting system being controllable responsive to said parameter information.

The consumable can comprise a cassette holding a supply of image receiving tape, a tape holder around which is wound a supply of image receiving tape or a supply of image receiving tape itself. It can further be a supply of thermal transfer ribbon.

In another aspect, the invention provides a method of controlling a printing apparatus, the method comprising: reading an electromagnetic signal supplied via a contactless link from a tag on a consumable providing information relating to

the consumable; checking said information and printing an image based on said information.

For a better understanding of the present invention and to show how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings, in which:

Figure 1 is a plan view of the mechanical arrangement of a printing apparatus;

Figure 2 is a side view of the mechanical arrangement of the printing apparatus;

Figure 3 is a front view of the mechanical arrangement of the printing apparatus;

Figure 4 is a cross-sectional view of the mechanical arrangement of the printing apparatus taken along line AA of Figure 1;

Figures 4A and 4B are perspective views from different angles of a tape holder, Figure C is a perspective view of a tape holder housed in a receiving part of the printing apparatus and Figure 4D is a perspective view of the receiving part of the printing apparatus without the tape holder installed;

Figure 5 is a schematic block diagram of control components of a printing apparatus;

Figure 6 is a diagram of a tag reader;

Figure 7 is a diagram of an RF tag;

Figure 8 is a perspective view of a ink ribbon cassette; and

Figure 9 is a plan view of the printing apparatus showing a photo-sensor.

The mechanical arrangement of the printing apparatus will now be described with reference to Figures 1 to 4. A label substrate comprises a tape 2 onto which images can be printed by a printing apparatus into which the label substrate is inserted. The tape 2 is housed on a tape holder 6, the details of which can most clearly be seen from Figures 4, 4a and 4b. The tape holder 6 comprises sides 60 and an inner spool 62 around which a supply of tape 2 is wound. The inner spool

62 may rotate within the tape holder 6 when tape is unwound. A spring clip 64 is attached to a flange on the tape holder and bears on the spool 62. The spring clip 64 prevents the tape from unwinding more than is required. An annular rib 58 is provided on each side of the tape holder 6 which allow it to be housed in a first receiving part 66 of the printing apparatus.

The first receiving part 66 is shown in Figure 4D, and has side supports 86, 88 each having an inward facing recess 67 designed to accept the corresponding rib 58 of the tape holder 6. The first receiving part 66 is adjustable to accommodate different width holders as will now be explained. The supports 86 and 88 of the first receiving part 66 are connected to toothed arms 80 and 82. The teeth of toothed arms 80 and 82 engage with opposite edges of a cog 84. In this way any movement of one of the supports 86 or 88 is mirrored by the other support, so that each support is always an equal distance from a centre line A (shown in Figure 1). This ensures that the tape will always be fed centrally to the print head, regardless of the width of the tape. The supports can be separated by a user to insert a holder, and then springs 74 (shown in figure 1) bring the supports together to grip the sides of the of the tape holder 6.

As shown in Figure 4C, the receiving part 66 is provided with a gear chain 71 powered by a motor 10 (shown in figure 1) that drives the inner spool 62 of the tape holder in order to rewind the tape to allow the holder to be removed from the device.

The printing apparatus comprises a gear chain 12, powered by a motor 10, which drives the feed roller 14 which causes the tape from the tape holder 6 to move towards a print zone 3 of the printing apparatus. At the print zone, a print head 16 is biased against a platen roller 18 by a spring 20. The spring 20 is held within a print head mounting block 19.

An ink ribbon cassette 8 (shown in Figure 8) holds an ink ribbon 4 and is similarly mounted in a second receiving part of the printing apparatus. It is mounted on

shafts 22 and 28 of the printing apparatus. The mounting block 19 may be moved by means of an actuator 21 to separate the print head and the platen to allow the ink ribbon cassette 8 to be removed from the printer. Unused ink ribbon 26 is stored on a supply reel 24 mounted on a shaft 22. Used ink ribbon 32 is stored on a take-up reel 30 mounted on a shaft 28. A motor 34 powers a gear chain 36. When the motor 34 is driving forwards, a first set of gears 36c, 36d drive the shaft 28 to pull the ink ribbon 4 in a forward direction from the supply reel 24 to the take-up reel 30, and a slipping clutch (not shown) disengages the shaft 22 so that it is not driven, but is free to turn. When the motor 34 drives in reverse, a second set of gears 36a, 36b drive the shaft 22 to pull the ink ribbon 4 in a reverse direction from the take-up reel to the supply reel, and a slipping clutch (not shown) disengages the shaft 28 so that it is not driven, but is free to turn.

The ink ribbon cassette 8 is located in the printing apparatus so that the ink ribbon 4 has a path which extends through the print zone 3, and in particular extends in overlap with the tape 2 between the printhead 16 and the platen 18. The platen 18 is driven by a platen motor 56, to drive the tape through the print zone.

A cutting apparatus 40 is located downstream of the print zone 3. The cutting apparatus comprises a circular cutting blade or cutting wheel 44 mounted on a cutter holder 54. The cutting blade 44 cuts the tape 2 against an anvil 52. A cutter motor 42 drives the cutting wheel 44 from a rest position across the width of the tape. Once the cutting wheel 44 has traversed the entire width of the tape, the cutter motor 42 is reversed and drives the cutter holder 54 back to its rest position. The cutter holder 54 is slidably mounted on two sliders 46 which span the entire width of the tape 2. The cutter holder 54 is attached to a belt 48 which is supported by two rollers 50. One of the rollers 50 is driven by the cutter motor 42 to cause the cutter holder to move along the sliders 46.

The mechanical function of the printing apparatus will now be described. During printing, the tape feed motor 10 and the ink ribbon motor 34 are activated to drive the tape 2 and the ink ribbon 4 respectively past the printhead 16 at an equal speed. Once the tape reaches the print zone, it is picked up by the platen 18, driven by the platen motor 56. An image is transferred onto the image receiving tape 2 by virtue of activation (heating) of particular printhead elements to transfer ink from the ink ribbon 4 to the substrate 2 in a known manner. Images are printed on a column by column basis as the tape 2 is moved past the printhead 16. This printing technique is known *per se* and so is not described further herein.

When the printing on a label is finished, the tape feed motor 10 and the ink ribbon motor 34 continue to feed the tape and the ink ribbon a predetermined distance until the end of the label is at the required cutting position. The tape may then be cut by the cutting apparatus 40. Once cutting is complete, the tape 2 is reversed by reversing the platen motor 56 that drives the platen 18 in reverse until the tape 2 is in the correct position for printing the next label. Whilst the tape is reversed, the ink ribbon 4 is also reversed at the same speed by driving the ink ribbon motor 34 in reverse. This prevents the ink ribbon 4 rubbing against the tape 2 and becoming damaged.

A photo-sensor 76 shown in figure 9 is mounted on the frame of the printing apparatus and detects the presence of tape 2. This prevents the printer printing if there is no tape present in the printer.

Figure 5 shows a schematic block diagram of the control components of the printing apparatus. A microprocessor 100 controls operation of the printing apparatus and is associated with a read only memory ROM 102, an electronically erasable programmable read only memory EEPROM 114 and a random access memory RAM 104. The printing apparatus includes a keyboard 106 for entering data (e.g. characters and symbols) and control commands for printing, and a display 108 for displaying to the user labels under edit, control commands, error

messages, etc. The microprocessor 100 controls the printhead 16, tape drive motor 10, ink ribbon motor 34, cutter motor 42 and the platen motor 56.

A tape monitor 112 monitors usage of the tape. In order to monitor usage of the tape in one implementation, the rear of the substrate tape may be provided with markings indicative of the amount of tape remaining. For example, alternating black/white spaces (stripes perpendicular to the lengthwise direction of the tape) could be provided where the ratio of black to white, or the absolute width of the spaces, varies from the beginning to the end of the tape. This could be a continuous change or discrete change, in the latter case for example changing every quarter of the tape only to provide a rough indication of how much tape is left. Another possibility would be a line extending diagonally along the entire length of the tape such that at any point the distance of the line from an edge of the tape differs. In that case, the tape monitor can comprise a reader for reading these markings. A suitable reading device is described for example in our US Patent Application No. 09/284,236 and suitable markings for usage indication are described in our US Patent Application No. 09/0141059.

A further alternative is to provide an end of tape detection, for example by providing silvering at the end of the substrate tape 2, which can be optically detected by the printing apparatus. Other end of tape detection means are known, for example using the encoded pulses from a feed motor shaft to sense if the shaft has stopped turning, due to reaching the end of the tape.

Usage of the ink ribbon in the ink ribbon cassette can be monitored in a known way, for example as described in US 5821975.

A tag reader/writer 110 is also provided in the printing apparatus. The purpose of this reader is to read information from and write information to RF tags on the tape holder 6 and ink ribbon cassette 8 in the printing apparatus. Each tape holder 6 or ink ribbon cassette 8 manufactured for use with a printing apparatus of the type described herein carries initial status information and parameter

information relating to that particular tape holder or ink ribbon cassette and their contents. In the described embodiment, this is carried on an RF tag 70 on the tape holder 6 and the RF tag 71 on the ink ribbon cassette 8.

The tag reader/writer 110 is shown in more detail in Figure 6. The reader/writer takes the form of an RFID data processing unit 202 that controls transceivers 204 and 206. A transceiver 204 communicates via an RF coil 212 with a coil 208 implemented at the tag 70 mounted on the tape holder 6, by way of electromagnetic radio frequency waves. A transceiver 206 communicates via an RF coil with a coil 210 implemented at the tag 71 mounted on the ink ribbon cassette 8. The signal communicated is encoded in a known way by modulating an RF carrier. The RF tags 70, 71 are passive devices that receive energy from the tag reader/writer 110 whenever they are accessed.

The tag reader/writer 110 is located in the printer so that it can read the signal from or write information to the tags 70 and 71, even though they are not at the same location. The RFID DPU 202 switches between the transceivers 204, 206 depending on which tag is to be read or written to.

Figure 7 shows a schematic of the RF tag 70. RF tag 71 is designed to work in a similar fashion. An RF coil 208 is provided to receive data signals and power from the tag reader/writer 110. The signals are received by digital circuitry 304, which includes a microprocessor, via analogue circuitry 302. The digital circuitry 304 has access to EEPROM 306, ROM 308 and RAM 310. During a read operation, the digital circuitry 314 can access information stored in the ROM 308, or stored in the EEPROM 306, in response to a request from the tag reader/writer 110. The information is transmitted to the tag reader/writer 110 via the analogue circuitry 302. Parameter information is programmed on the ROM 308 during fabrication. Initial status information is programmed onto the EEPROM 306 during fabrication, and then may be reprogrammed on the tag during use by performing a write operation. During a write operation the new status information is transmitted by the tag reader/writer 110 to the tag 70. This information

overwrites existing information stored in the EEPROM 306, and is then accessible in future read operations by the tag reader/writer 110.

The parameter information includes for example the width of the supply and the material properties such as the colour, type of material, etc. The status information includes capacity information relating to the number of labels or meterage of tape. The initial capacity information can be stored at the time of production.

The parameter information is displayable on the display 108, either continuously or upon request. It could be displayed graphically or in an alphanumeric way. The parameter information can be used to control printing, for example if tape of a certain width is included, characters can be sized accordingly. The parameter information can also be used to alter mechanical parameters in the printer. For example, if a narrow tape is inserted the travel of the automatic cutter could be adjusted to reduce the cutting time. The cutter could be disabled for certain materials and/or the printhead pressure could be adjusted.

The status information is continuously updated as the image receiving tape is consumed. This is achieved by the tape usage monitor passing information to the microprocessor 100 which controls the tag reader/writer 110 to write back the information to the tag 70 after each printing operation is accomplished. The updated information can be displayed on a display, either continuously or upon request, either graphically or in an alphanumeric way. Before a batch printing operation is commenced (for example multiple copies of a particular label are requested by a user) a check can be made to see if sufficient tape is left and this information can be provided to a user. A similar technique can be used where a long label is requested – a check can be made before the printing operation is commenced to avoid that the user runs out of tape halfway through the printing of a long label.

CLAIMS:

1. A printing apparatus using a consumable providing at least one of an image receiving substrate and a thermal transfer material, the consumable carrying a tag holding information relating to the consumable, the printing apparatus comprising:

printing means for printing an image;

a tag reader arranged to receive said information from the tag via a contactless link in the form of electromagnetic waves; and

a processor arranged to receive said information and to control operation of the printing apparatus in dependence thereon.

2. A printing apparatus according to claim 1, wherein the consumable provides image receiving tape on which the printing means prints an image.

3. A printing apparatus according to claim 1, wherein the consumable provides thermal transfer material for use in a printing operation effected at the printing means.

4. A printing apparatus according to any preceding claim, wherein said information is status information, and wherein the processor is arranged to update the status information based on operation of the printing apparatus in the contactless link.

5. A printing apparatus according to any preceding claim wherein said tag is an RF tag and the tag reader is an RF reader.

6. A printing apparatus according to any preceding claim, which comprises tape usage monitoring means for monitoring usage of the image receiving tape as images are printed.

7. A printing apparatus according to claims 4 and 6, wherein said status information includes the amount of image receiving tape remaining, and is updated in dependence on the output of the tape usage monitoring means.

8. A printing apparatus according to claim 4, wherein the tag also includes parameter information identifying parameters of the image receiving tape usable for controlling operation of the printing apparatus.

9. A printing apparatus according to claim 8, wherein the parameter information identifies the width and/or the nature of the image receiving tape.

10. A printing apparatus according to any preceding claim, which comprises a display adapted to display said status information and/or said parameter information, when present.

11. A printing apparatus according to claim 8 or 9, which comprises a cutting system arranged to cut off a portion of the image receiving tape, said cutting system being controllable responsive to said parameter information.

12. In combination, a printing apparatus and a consumable providing at least one of image receiving substrate and thermal transfer image having a tag holding information relating to the consumable, the printing apparatus comprising:

printing means for printing an image;

a tag reader arranged to read said information from the tag on the consumable via a contactless link in the form of electromagnetic waves; and

a processor arranged to receive said information and to control operation of the printing apparatus in dependence thereon.

13. A combination according to claim 12, wherein the consumable comprises a cassette holding a supply of image receiving tape.

14. A combination according to claim 12, wherein the consumable comprises a tape holder around which is wound a supply of image receiving tape.
15. A combination according to claim 12, wherein the consumable comprises a supply of thermal transfer material.
16. A method of controlling a printing apparatus, the method comprising:
 - reading an electromagnetic signal supplied via a contactless link from a tag on a consumable providing information relating to the consumable;
 - checking said information and printing an image based on said information.
17. A method according to claim 16, wherein said the consumable provides image receiving tape and the information is status information identifying the length of image receiving tape remaining for receiving an image.
18. A consumable providing at least one of image receiving substrate and thermal transfer material and carrying a tag holding information relating to the consumable, and having a transmitter for transmitting the information via a contactless link in the form of electromagnetic waves.

1/12

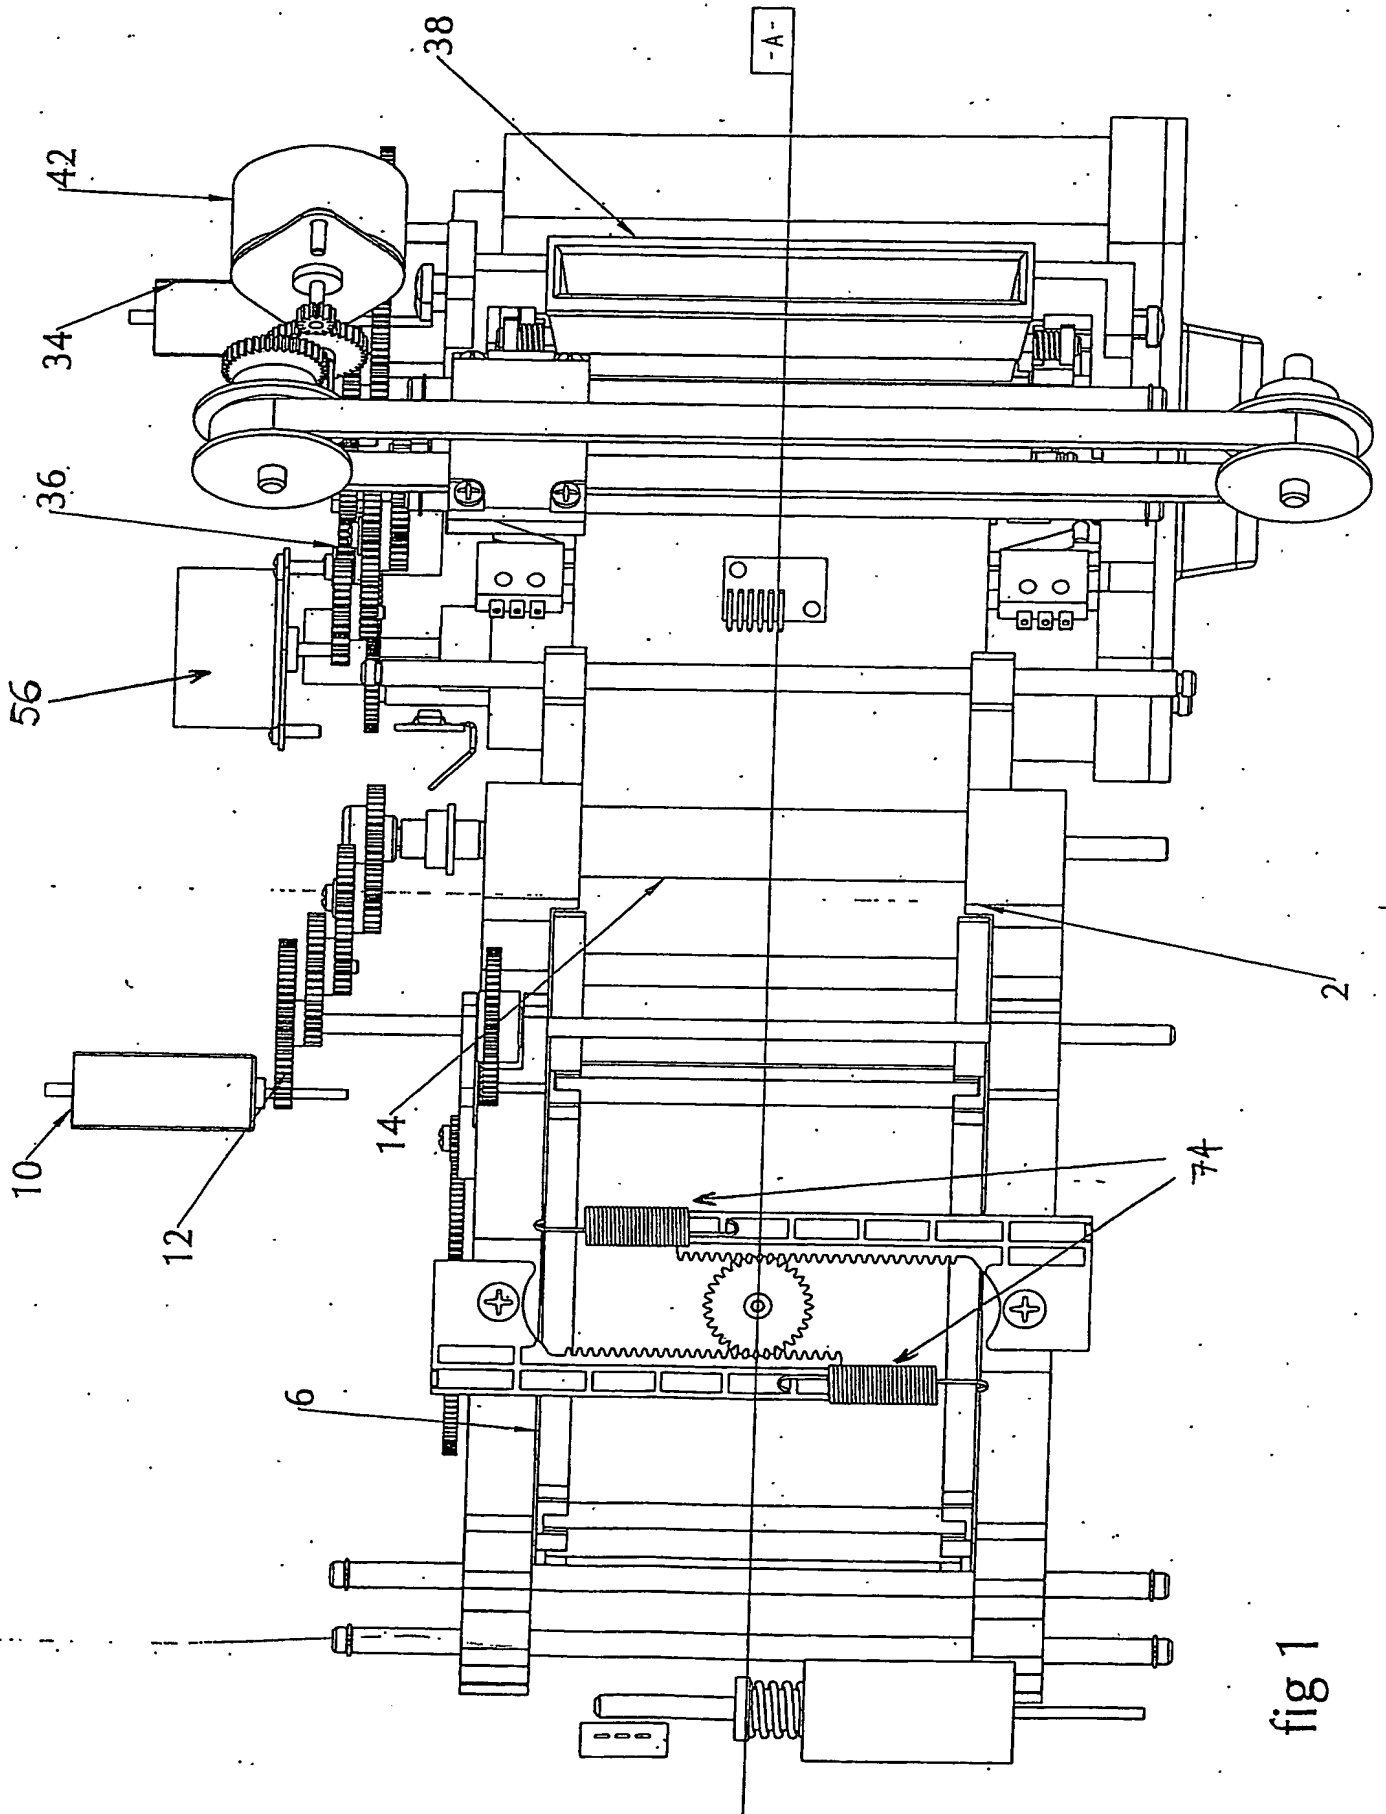


fig 1

2/12

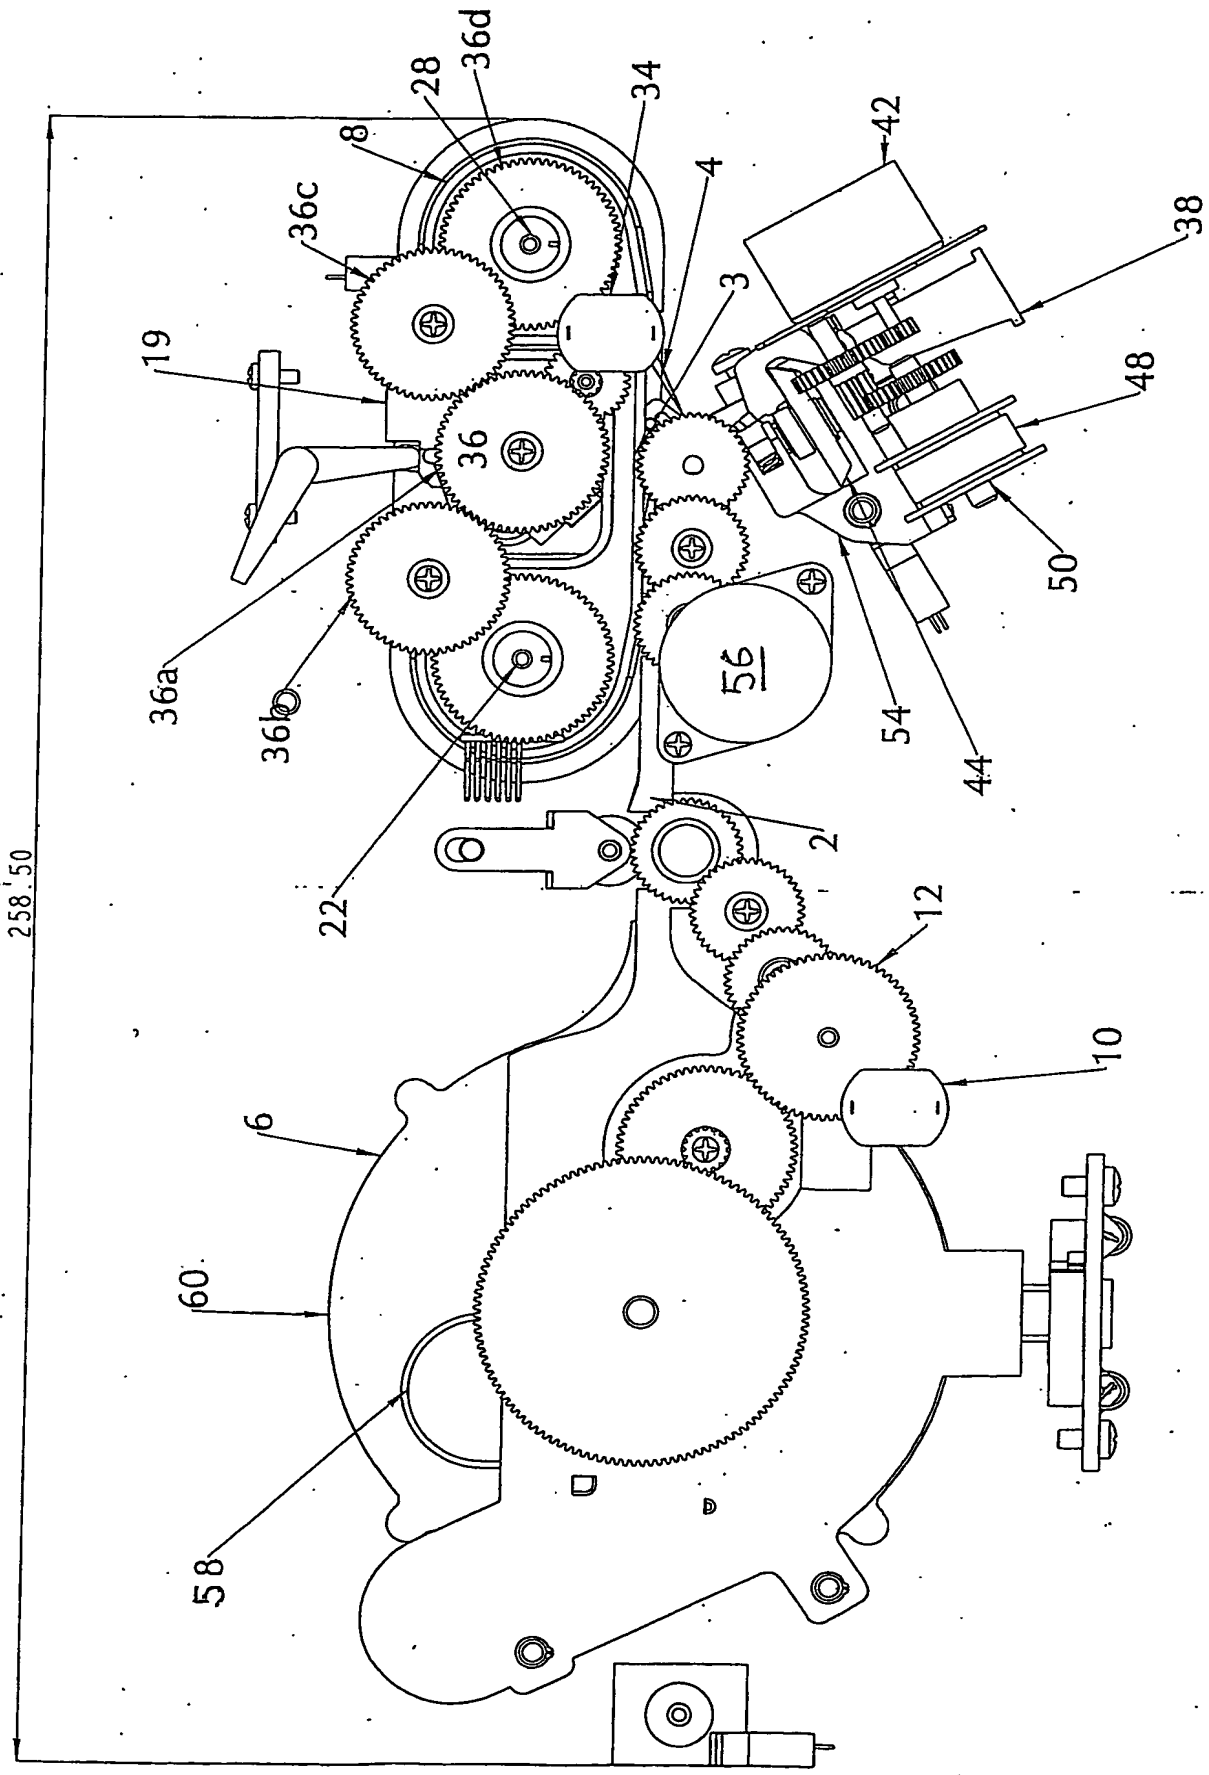


fig 2

3/12

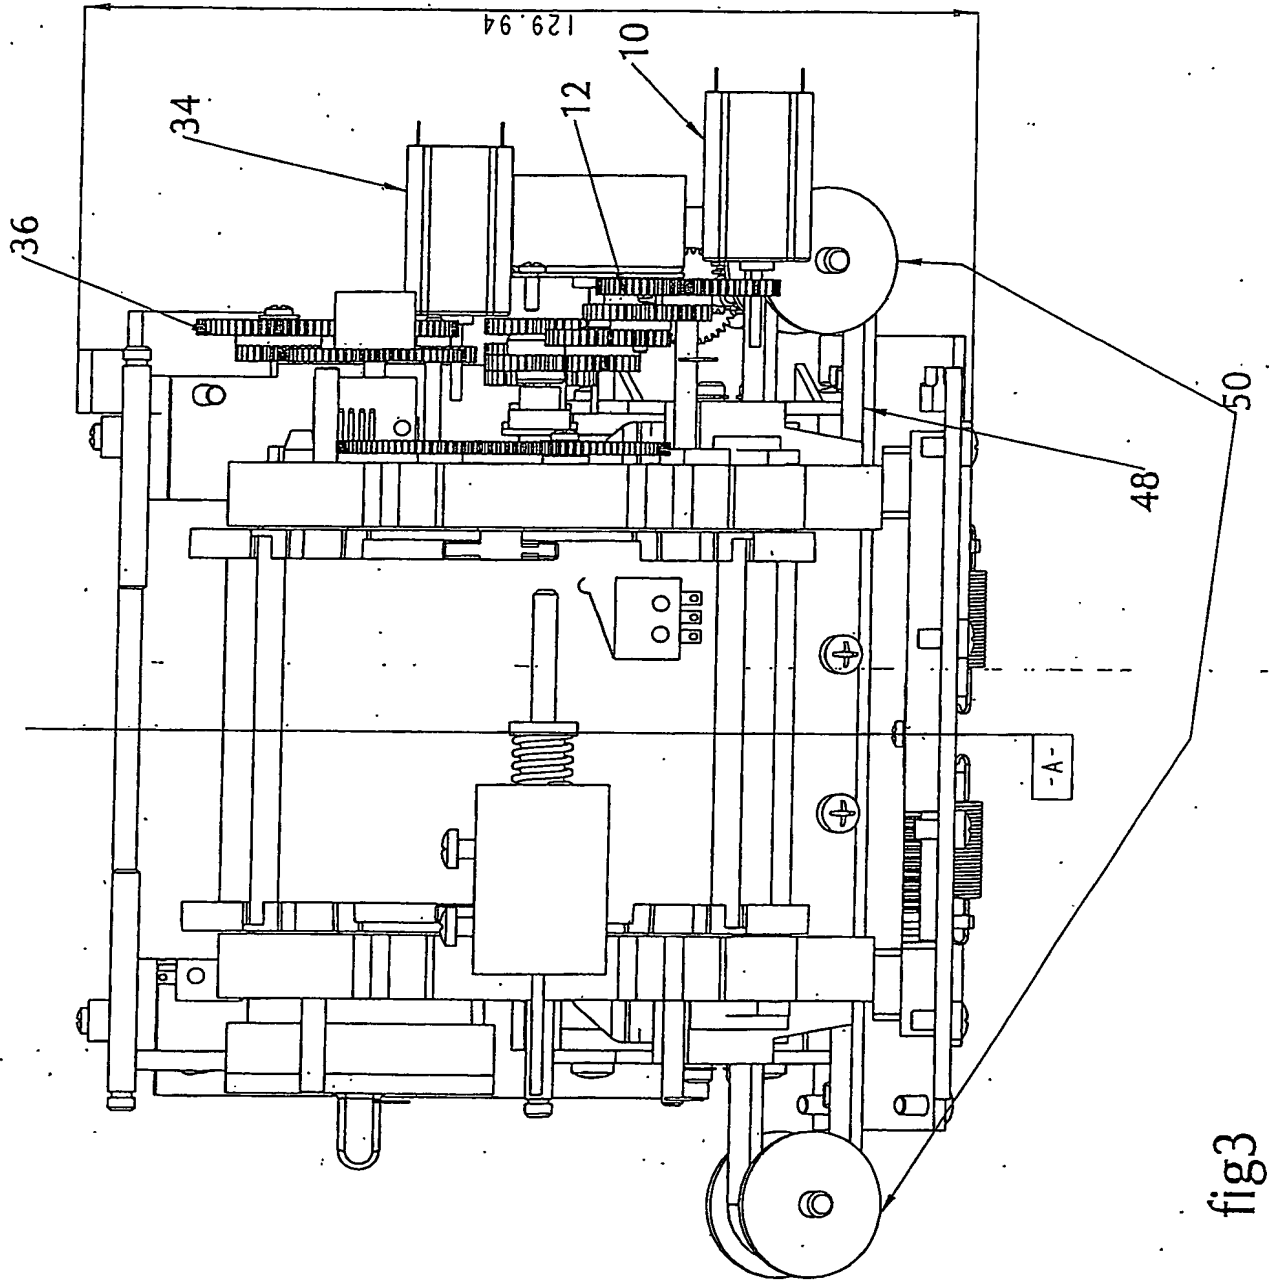


fig3

4/12

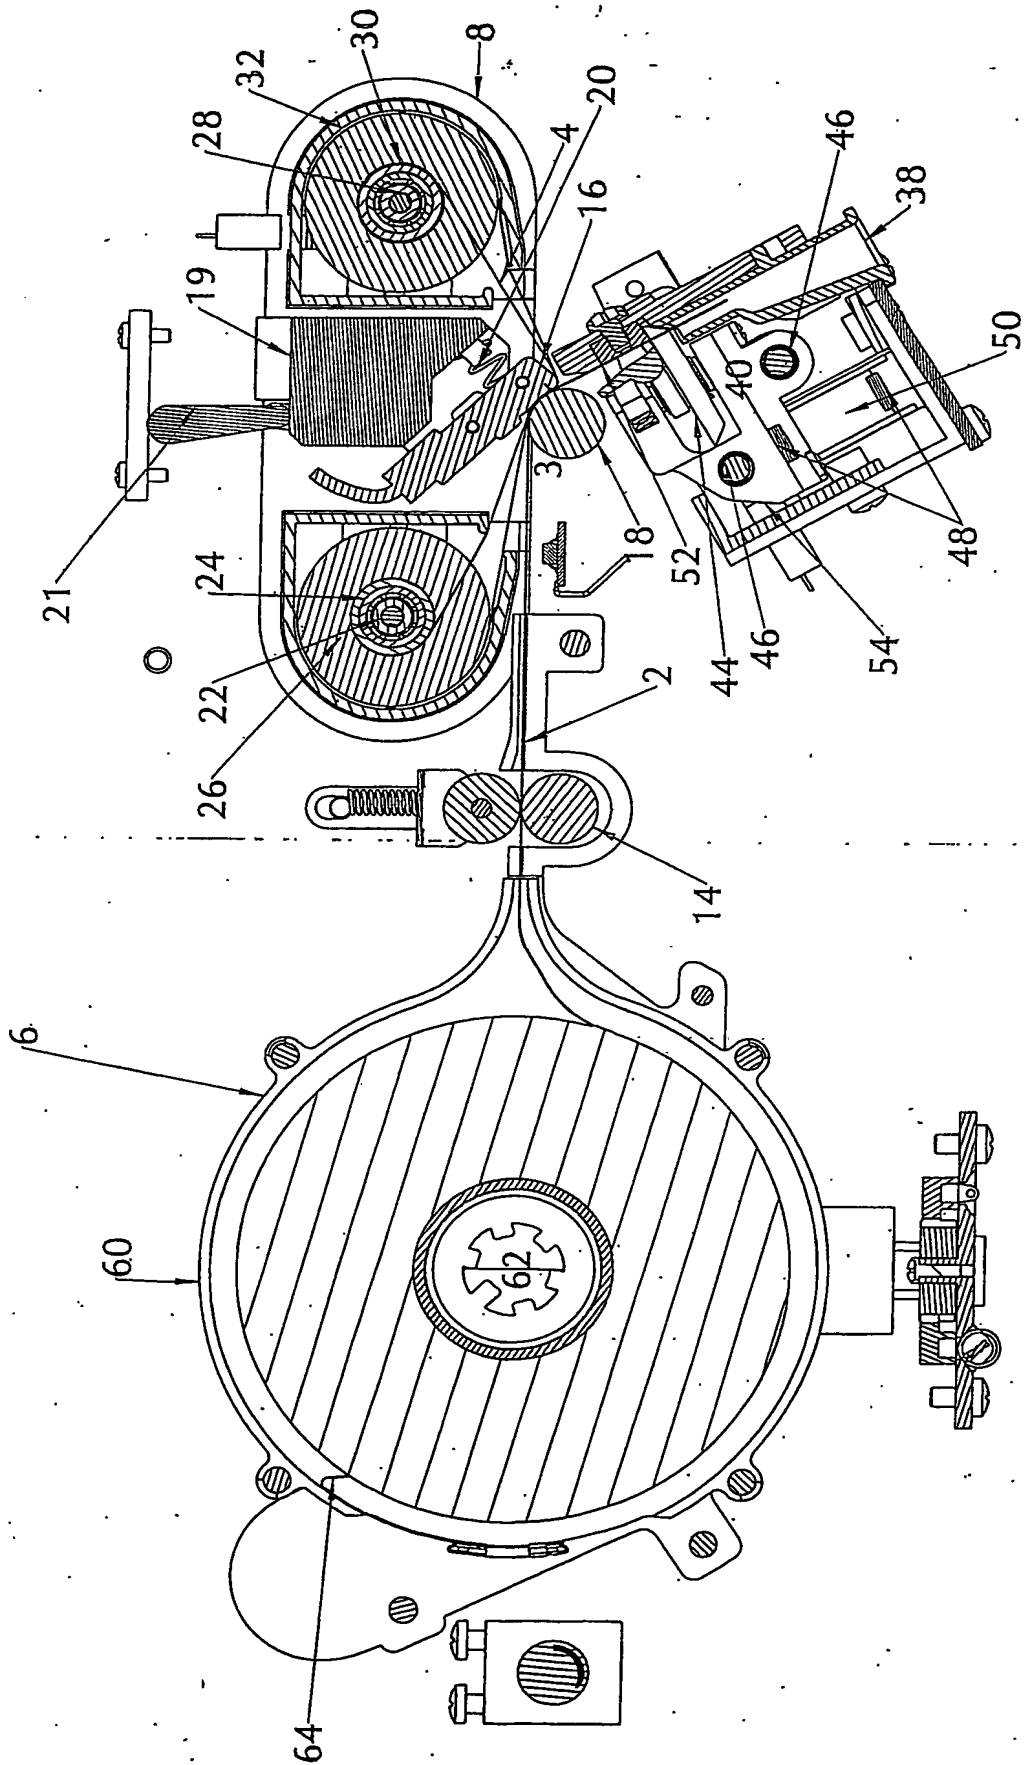


fig4

5/12

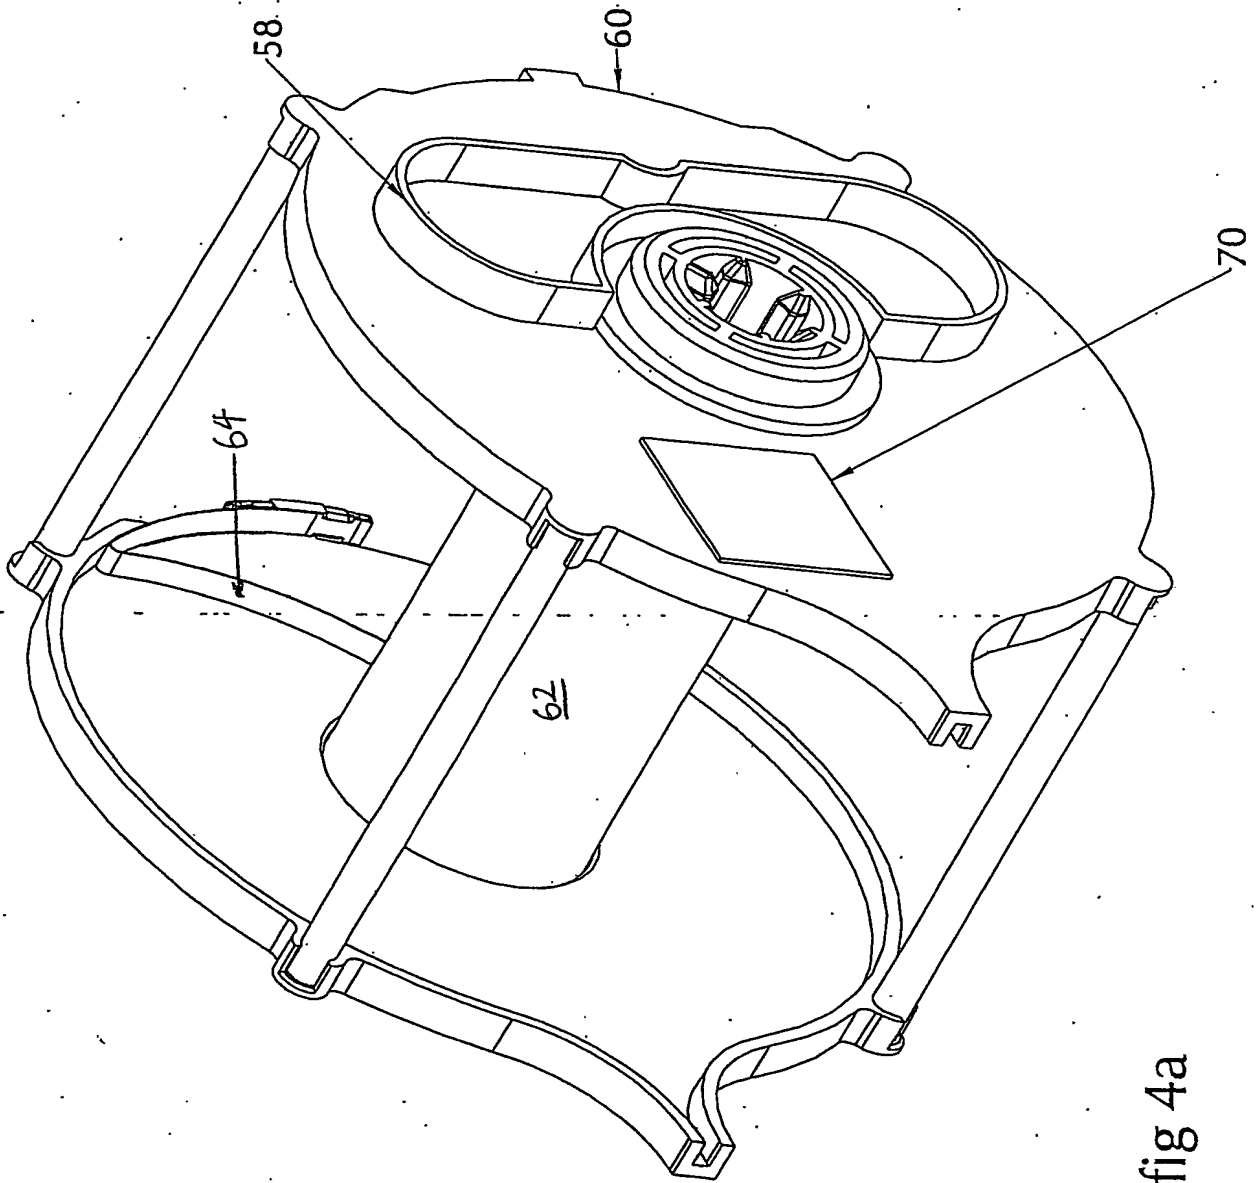


fig 4a

6/12

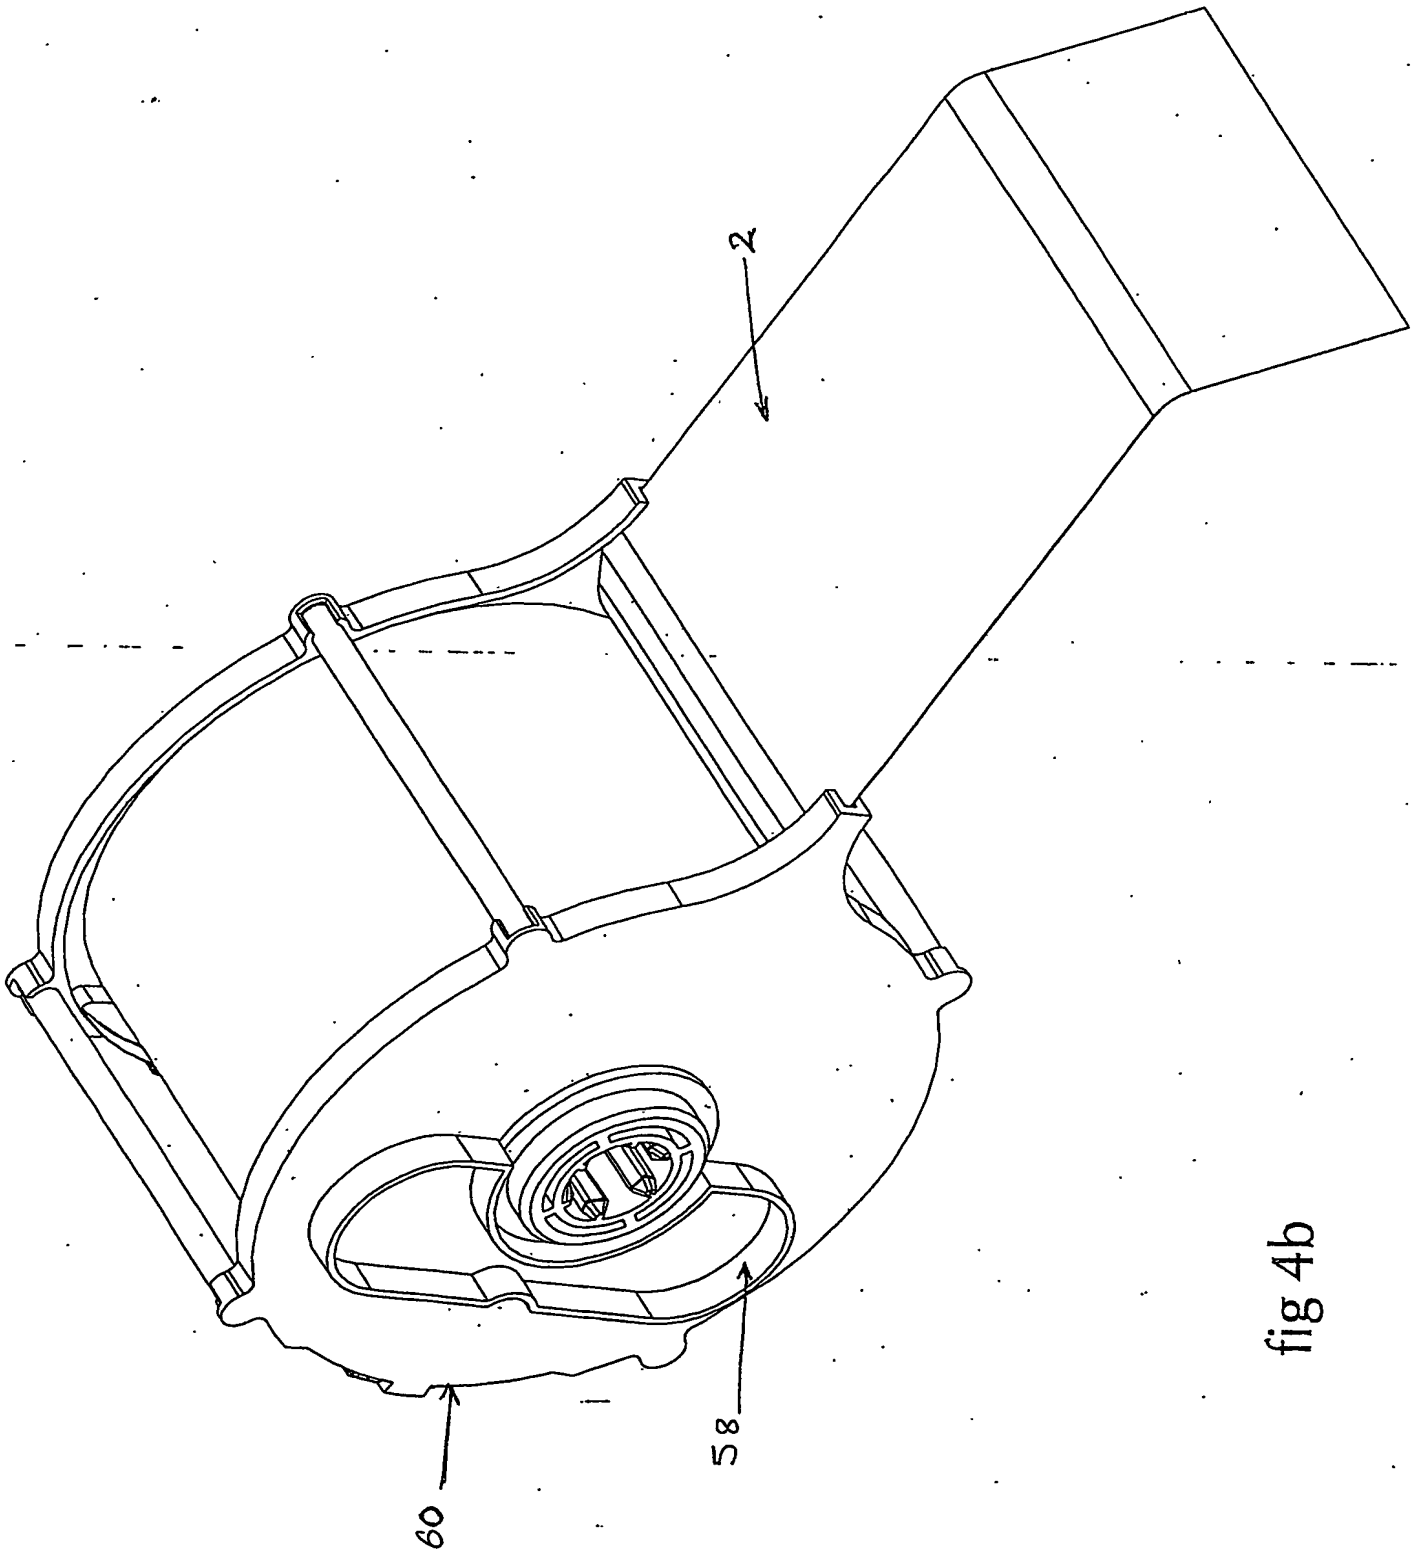


fig 4b

7/12

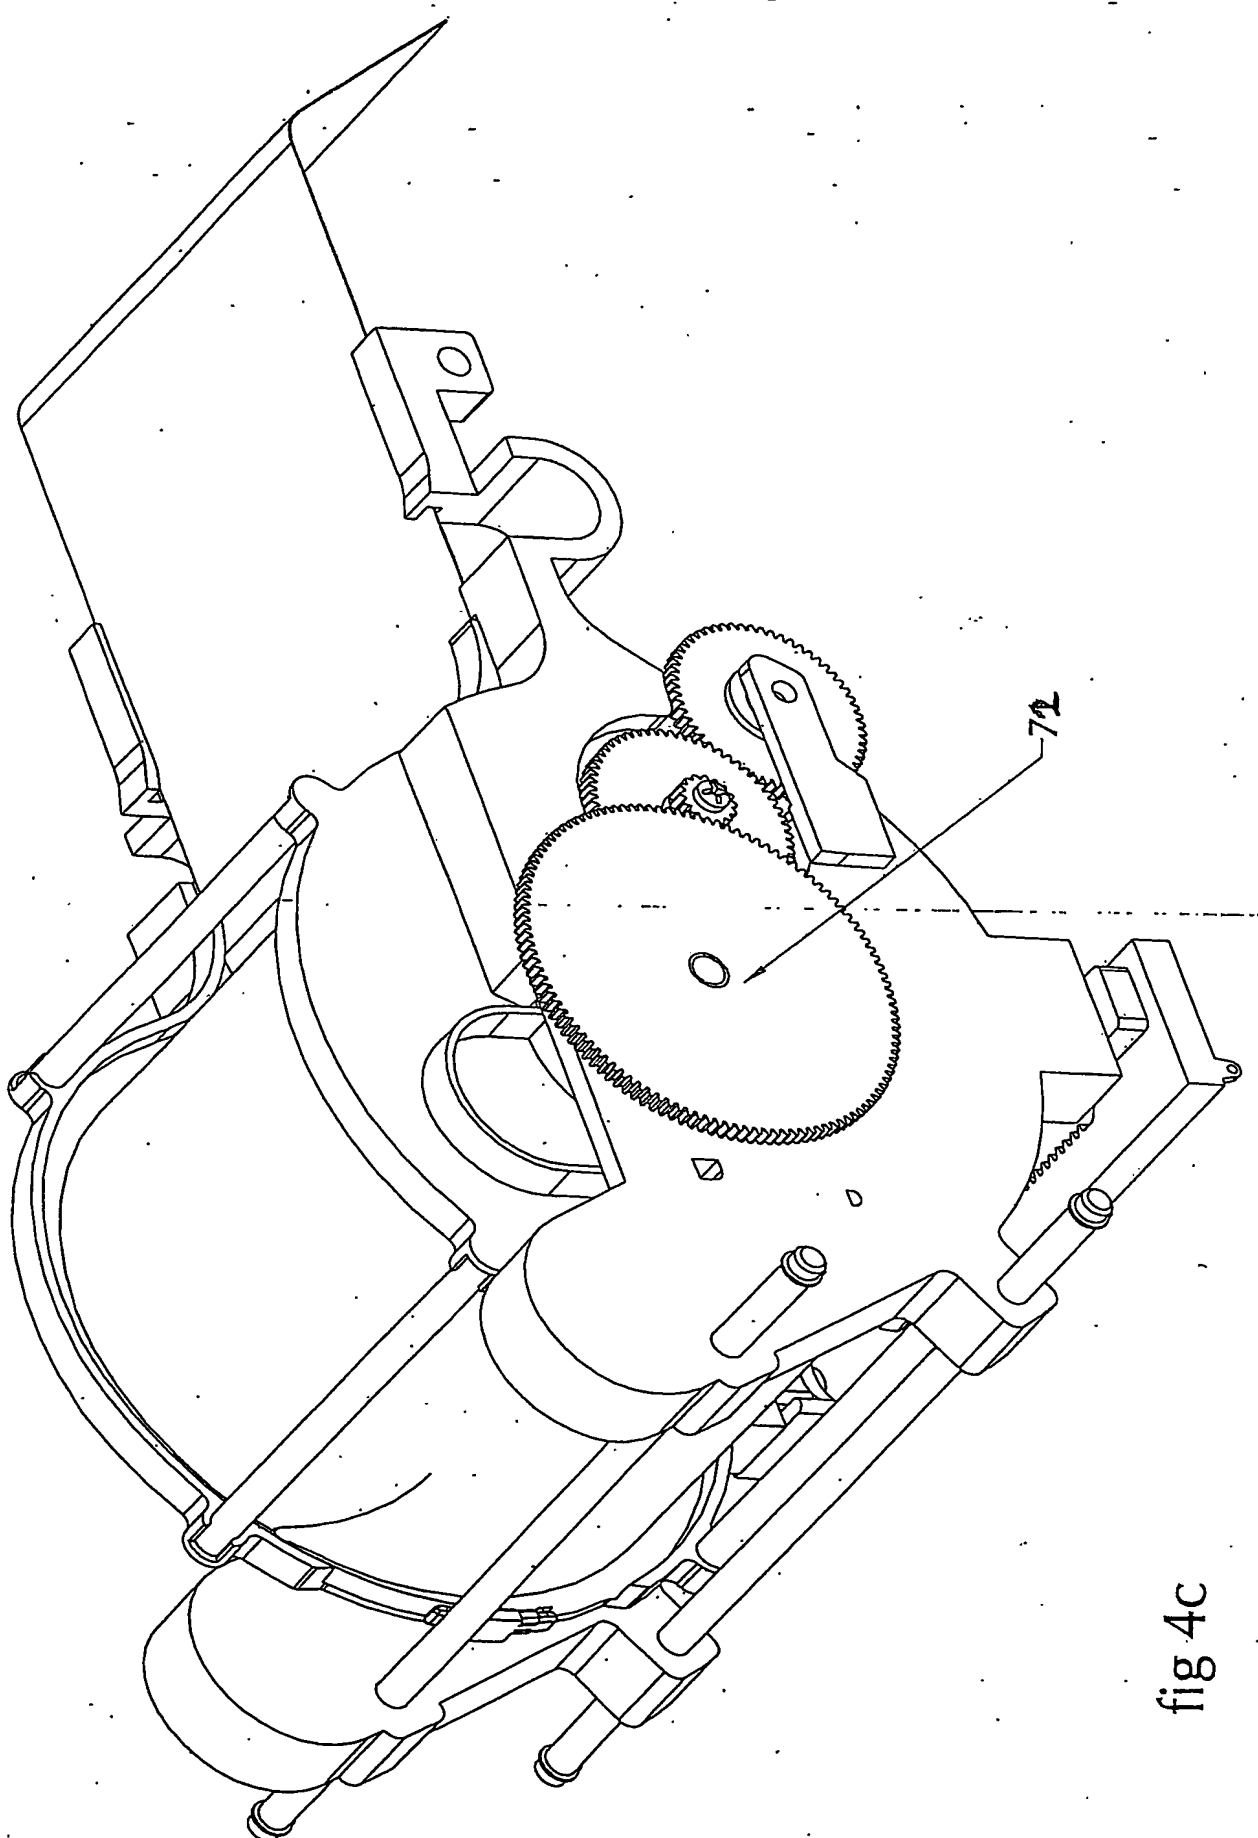


fig 4c

8/12

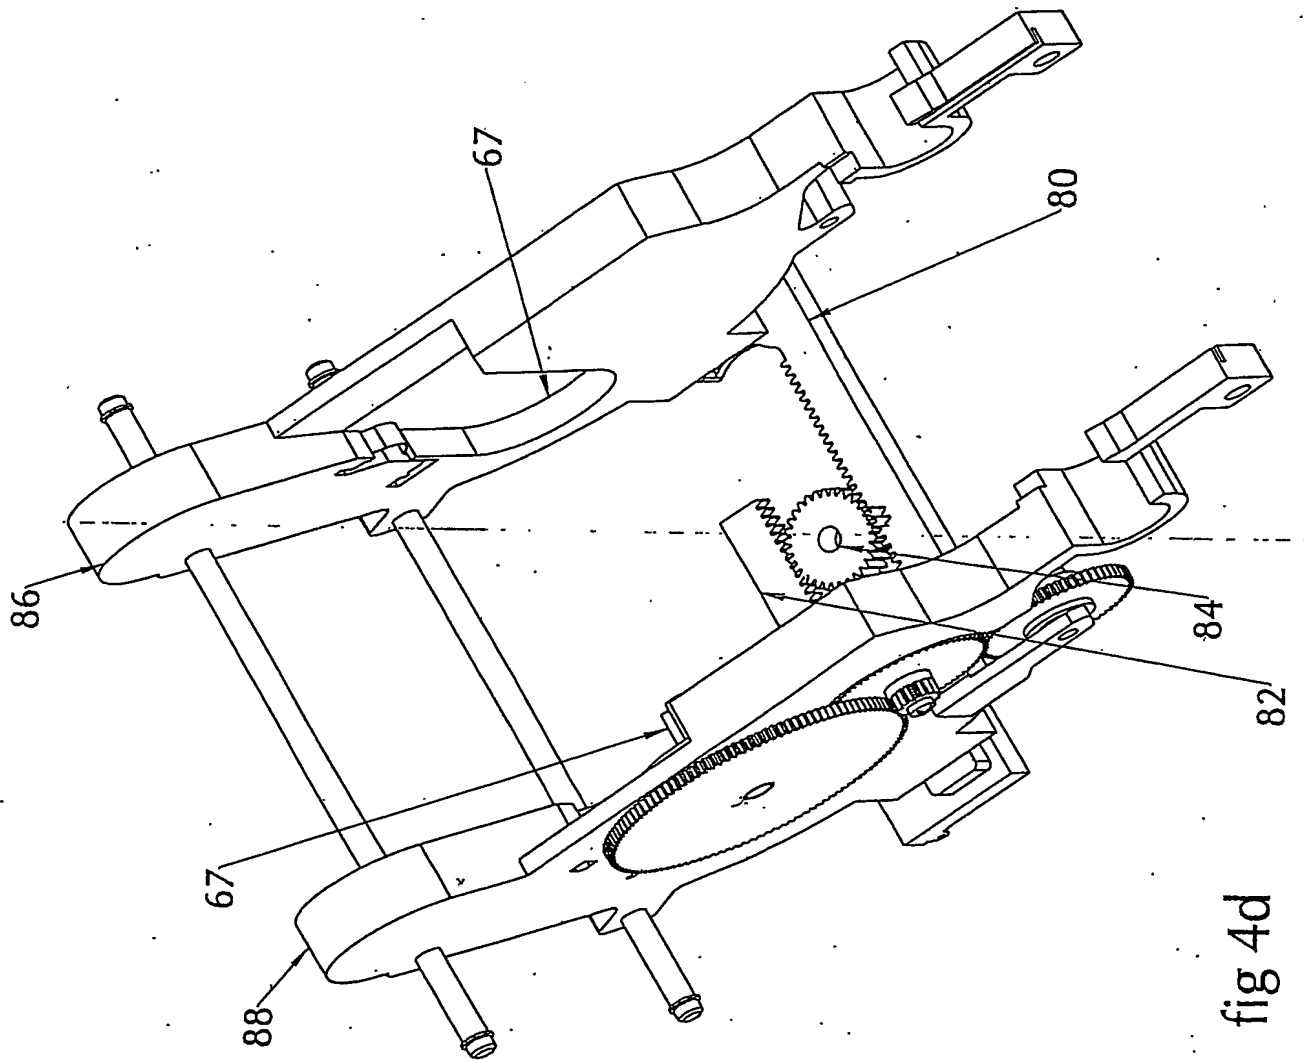


fig 4d

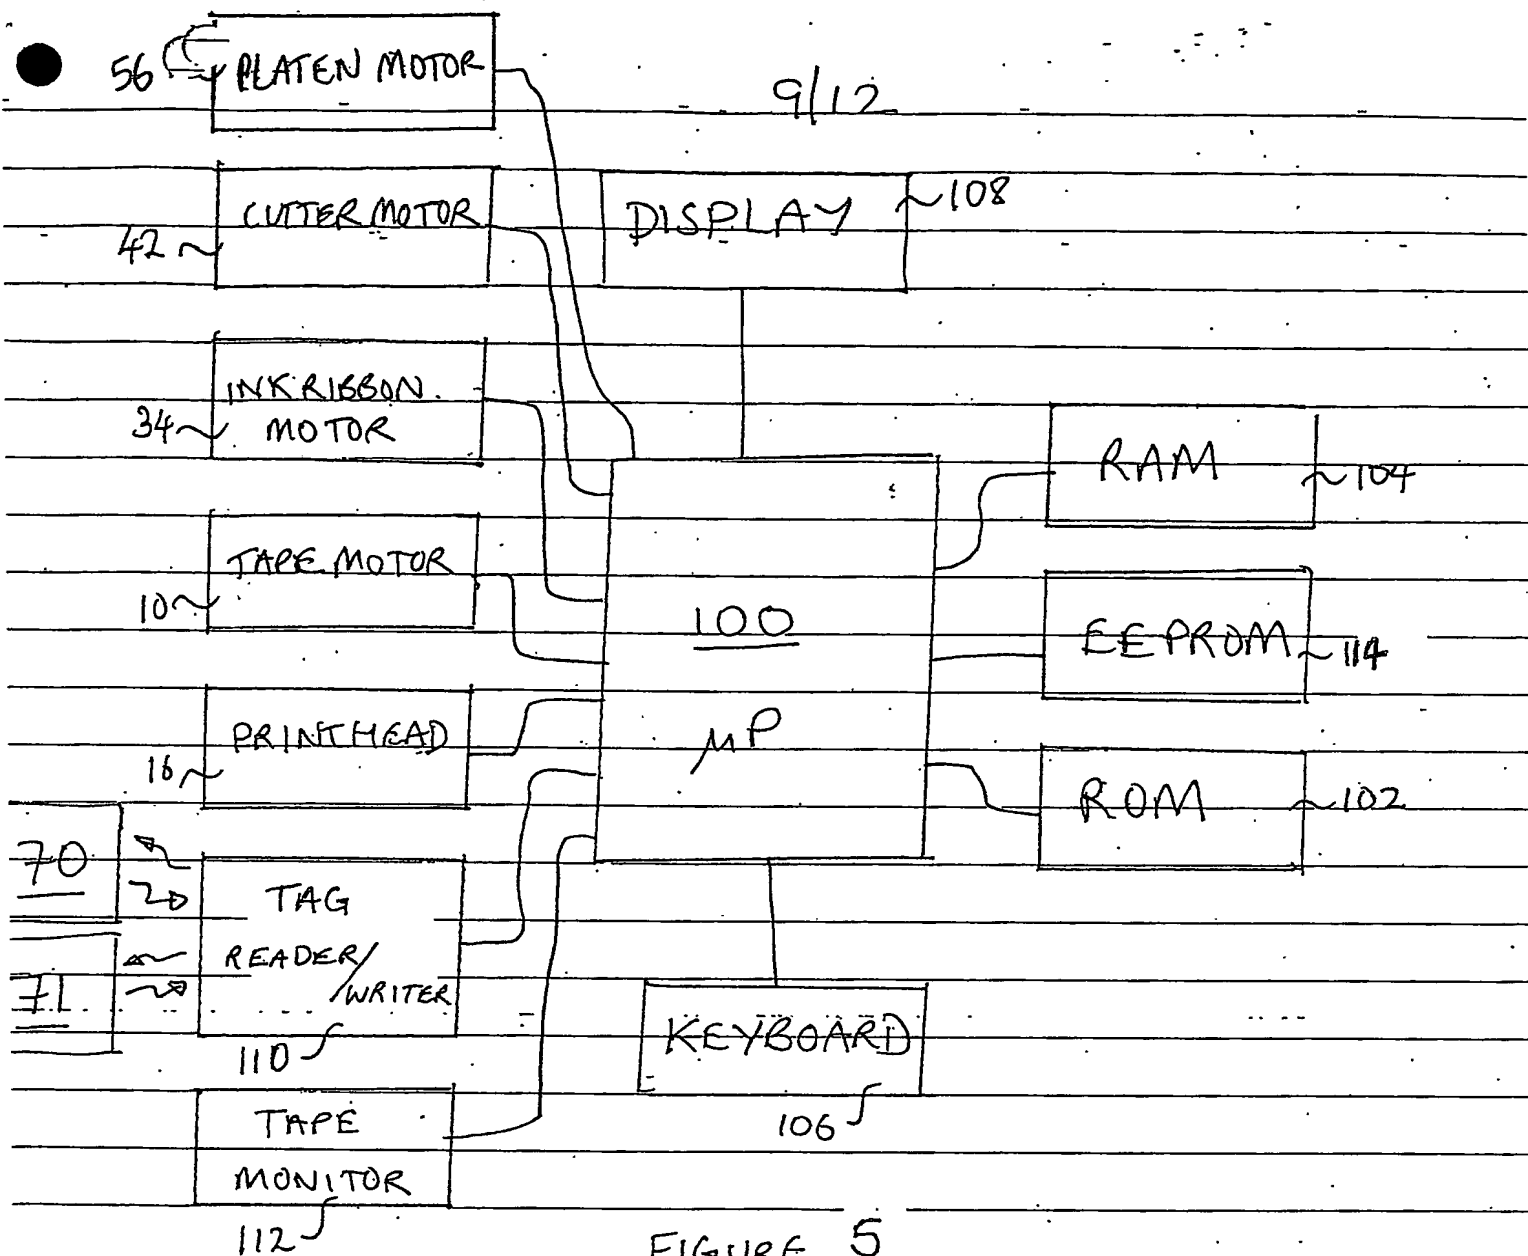


FIGURE 5

10/12

FIGURE 6


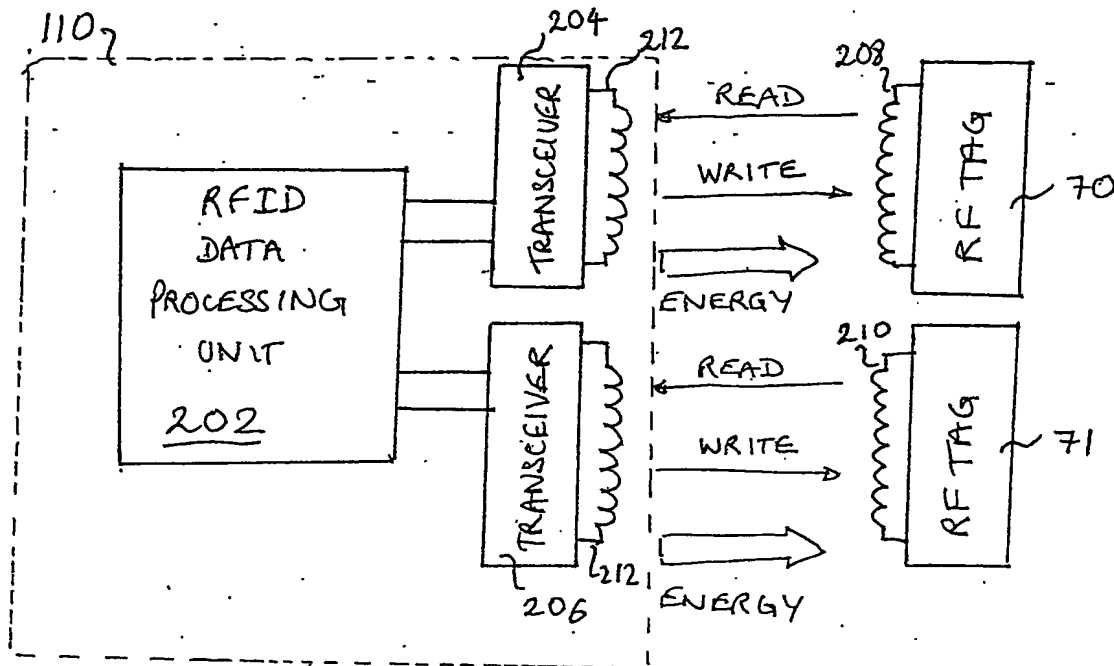


FIGURE 7 - RF TAG

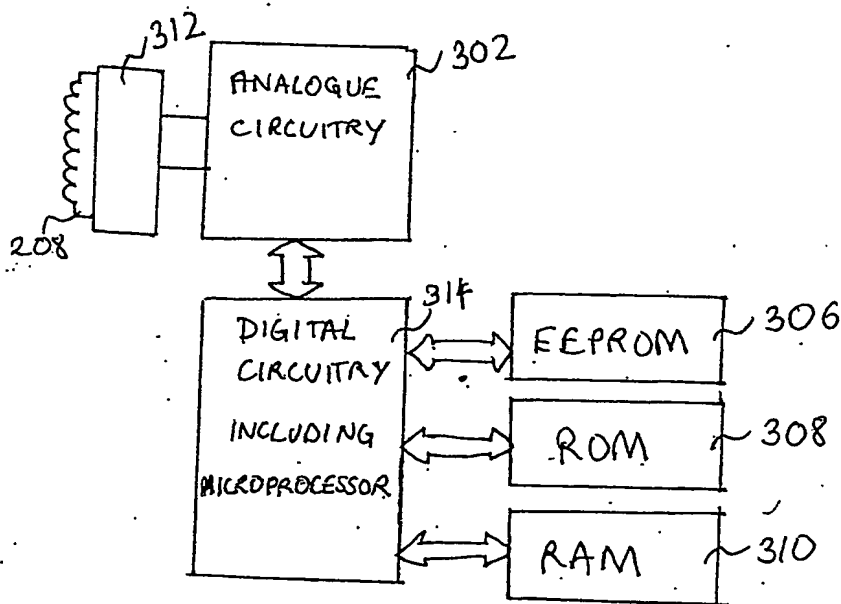

11/12

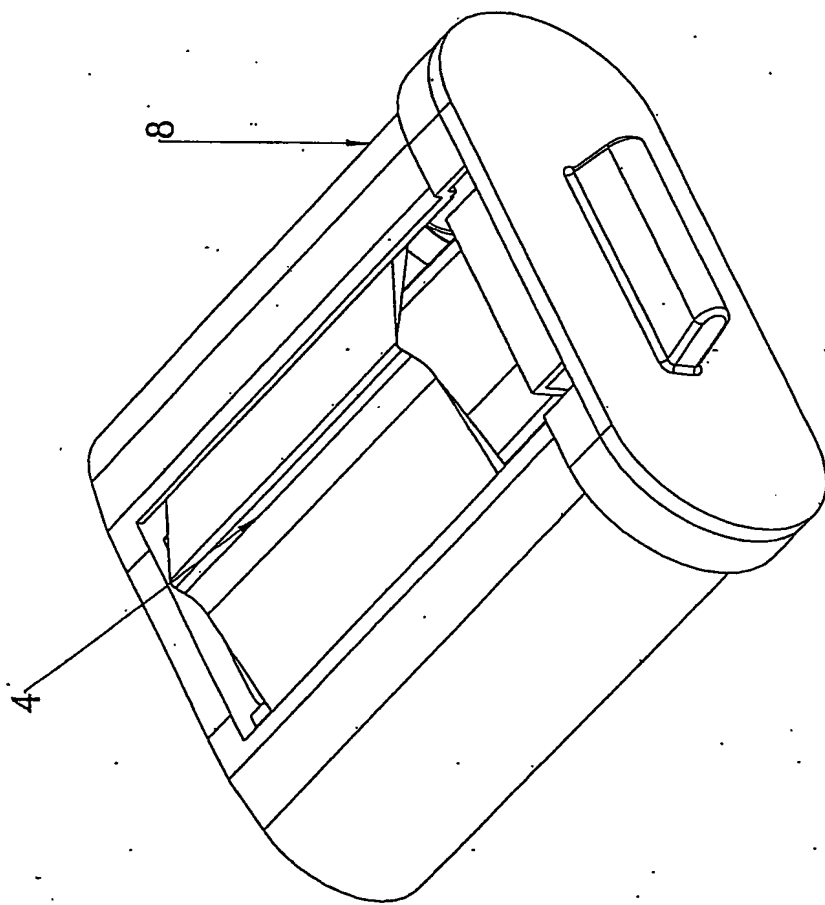


fig 8

12/12

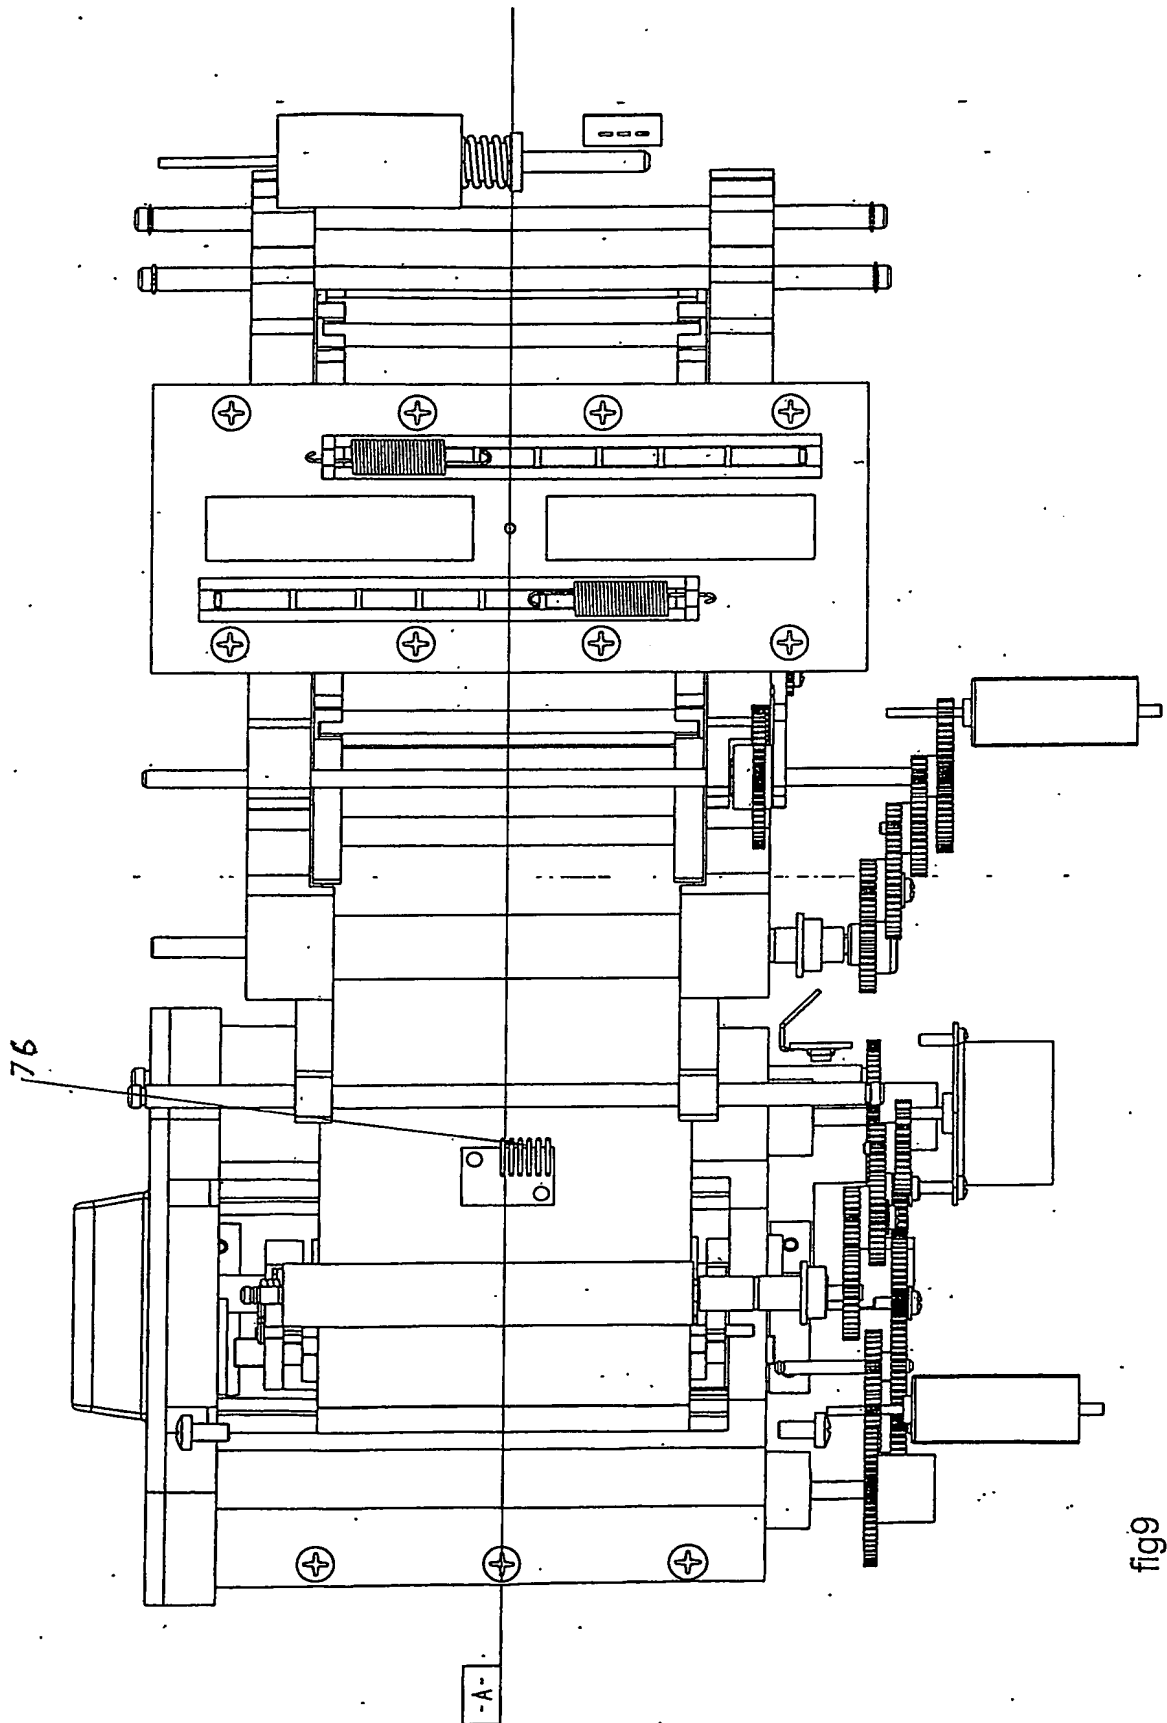


fig9

PCT Application
PCT/EP2003/014991

